



GX Series Diesel Forklift 5 tonne

**ROBUST DESIGN,
BREAKTHROUGH PERFORMANCE**

IMPROVED PERFORMANCE, BETTER ERGONOMICS AND REDUCED CARBON FOOTPRINT

- ✔ Move more loads with 17% faster operations due to increased speed up to 20 kmph
- ✔ Handle demanding operations with 21% gradeability compared to earlier 17%
- ✔ Eco-friendly operations with compliance to the latest CEV-IV norms
- ✔ Fatigue-free operations even in longer working hours with a new engine with reduced noise and vibration
- ✔ Stay informed with digital cluster for enhanced machine monitoring and service management




PERFORMANCE AND PRODUCTIVITY WITH EVERY MOVE



CEV IV compliant engine for eco-friendly operations

Equipped with powerful and efficient turbocharged CRDI engine churning out 54.4 kW at 2200rpm (73 HP). Up to 37% reduction in emission of harmful gases (CO, NOx, HC). Lowest noise and vibration levels compared to any other engine in its class.

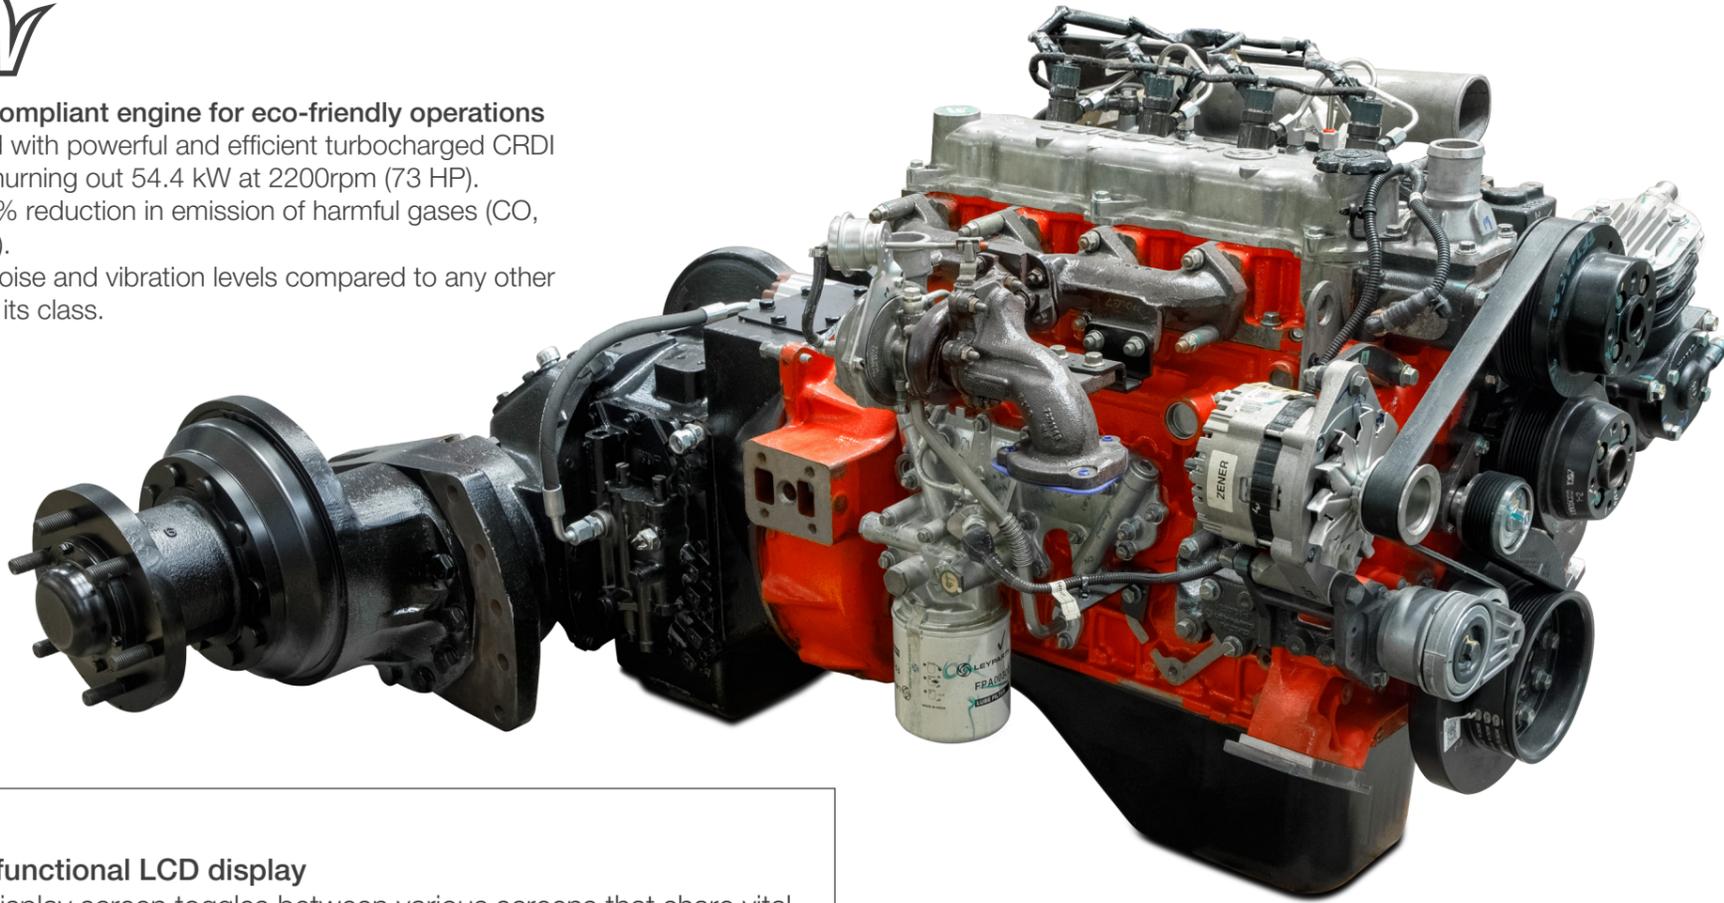

Multifunctional LCD display

The display screen toggles between various screens that share vital information about the operational parameters and fault codes for quick and easy diagnostics. It also allows setting of service reminders helping keep track of service schedules.



Efficient and effortless operations

Automatic hydrodynamic transmission eliminates clutch operation and reduces operator fatigue. The transmission is manufactured in-house

and integrates perfectly with the engine to give operations the required speed and torque. Constant mesh gears eliminate gear clashing resulting in lower maintenance costs.

XB model

- XB model with extended 750mm load center handles longer and wider loads with ease and safety.



Improved cooling

Redesigned airflow inside the counterweight and a 75% increase in window size ensures efficient performance and improve engine cooling.




Robust construction

Hydrostatic steering with laterally mounted cylinder is engineered to be low on maintenance and longer in service life.



Power on slopes

Higher gradeability of 21% enables you to tackle more demanding operations and tougher ground conditions with ease.

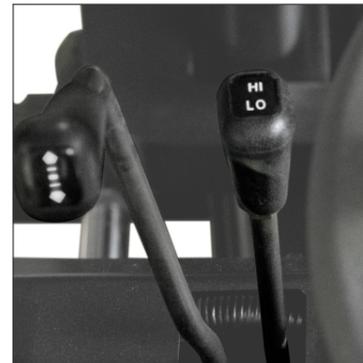

Pick the mode of choice

Two speed modes are available for improved fuel and operational efficiency. Choose between high speed and high torque based on your operational requirement.

OPERATOR COMFORT AND SAFETY ARE OF UTMOST PRIORITY



Superior stability and drive quality
Standard forklift equipped with four tyres in the front provides better weight distribution, superior ride quality, and safer lifting operations.



Better braking
Pneumatically controlled hydraulic disc brakes require low braking effort; reducing operator fatigue during operations.



Easy manoeuvrability
Hydrostatic power steering with a small diameter steering wheel of 315mm which requires minimal effort to steer even with load.



20% quieter operations
A new low noise engine combined with redesigned engine hood insulation reduces noise and vibration.



Operator-friendly driver module
4-way adjustable seat, ample leg space and ergonomically placed levers keeps fatigue at bay; helps operator focus on handling tasks.



Operator presence sensing (Optional)
OPS prevents engine start when the operator is not seated, or the seatbelt is not fastened. Additionally, OPS brings the engine to idle rpm during operation, slowing/restricting all travel and lift capability when the operator is not seated correctly with the seatbelt fastened.



Visibility like never before
Clear View Mast and thoughtfully designed overhead guard improve visibility on all sides for greater safety and ease of operations



Easy ingress and egress
Low entry step, high overhead guard clearance and grab handle ensures the operator gets on and off the forklift truck safely and easily from both sides.



Anti-anking feature prevents accidental re-anking of engine after it is started.



Safety release on parking brake lever prevents accidental release of parking brake.



Neutral start control ensures the truck only starts in neutral gear to prevent unintended travel.



Tilt lock valve locks the mast in any tilted position for stable operations with heavy loads.




Load lowering control valve regulates lowering speed to ensure safety while lowering loads.

EASY SERVICEABILITY



Location no bar

No matter where you are using theGX Diesel Forklifts, our wide service network assures you the best service in the shortest possible time.

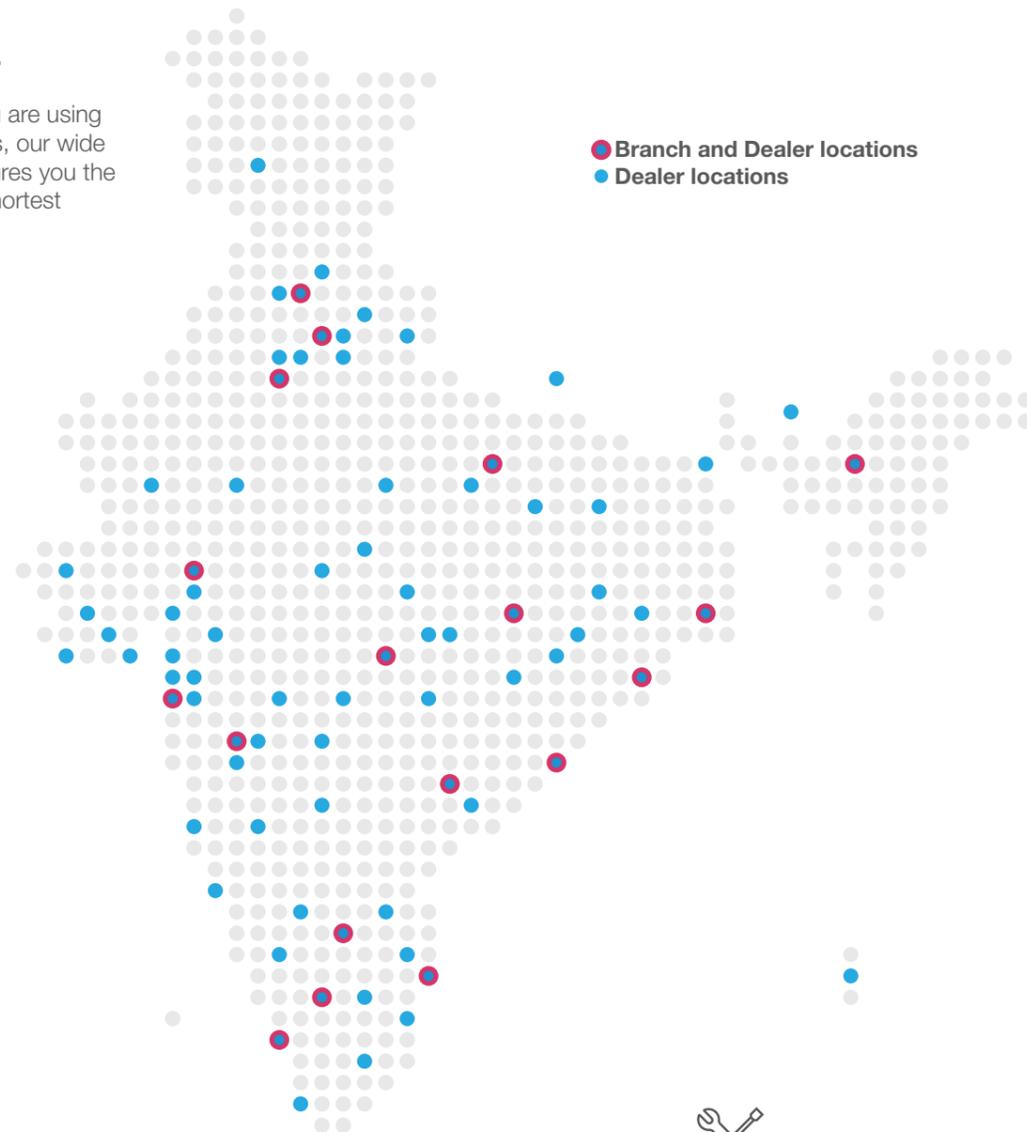

● Branch and Dealer locations
● Dealer locations



Spare parts, anywhere

Assured genuine spares through our Pan-India network of over 90 touch points.



Super easy preventive maintenance

Easy access to sub-assemblies and main aggregates for better serviceability.

STANDARD AND OPTIONAL ACCESSORIES

STANDARD INCLUSIONS

- Engine compliant to latest emission norms - CEV IV
- 4 cylinder, 4-stroke, water cooled CRDI engine
- Push button engine start, key switch engine off
- Powerful 2-speed automatic torque convertor transmission
- Articulated steer axle with lateral steering cylinder
- Hydrostatic power steering
- Head & tail lights, signal lights, reverse alarm, rear view mirror and non-retractable seat belt
- One pair of standard 1200mm hook-on forks
- Multifunctional LCD display
- Sturdy and rugged driver's overhead guard
- Toolkit, canopy

OPTIONAL

- Adjustable steering column
- Solid tyres
- Towing coupler
- Long forks – 1600mm

SAFETY ACCESSORIES

- Operator Presence Sensing (OPS)
- Retractable seat belt
- Spark arrestor
- Overload alarm



Access control system*

- Electronic pin access
- Key card access
- Biometric access control



Safety Lights

- Red halo safety lights
- Blue safety lights
- Reverse spotlight
- Emergency flashing light

ATTACHMENTS

- Fork extensions
- Paper roll clamp
- Fork mounted crane
- Fork positioner
- Ram attachment
- Side shifter
- Carriage mounted crane

Note: For any other attachments required please consult your nearest Godrej branch or dealer

*Customers can choose from one or more options







SafeLog is an indigenous fleet management system that allows access to live data of all material handling equipment operations. Keep up with machine uptime, fuel consumption, fleet utilization and equipment health all in one place for data based decision making.

TECHNICAL SPECIFICATION

		GX500D (SB)		GX500D (XB)		
Characteristics	1.2 Model	-	GX500D (SB)	GX500D (XB)		
	1.3 Drive (Battery, Diesel, Petrol)	-	Diesel	Diesel		
	1.4 Operation	-	Seated	Seated		
	1.5 Rated capacity	kg	5000	5000		
	1.6 Load centre distance	c (mm)	600	750		
Weight	1.8 Load distance (Front Overhang)	x (mm)	510	560		
	1.9 Wheelbase	y (mm)	2010	2310		
	2.1 Service weight incl. battery	kg	7000	7200		
Tyres, chassis	2.2 Axle loading, laden front/rear	kg	11000/1200	12350/1020		
	2.3 Axle loading, unladen front/rear	kg	2800/ 4200	4440/ 3835		
	3.1 Tyres	-	Pneumatic/Solid	Pneumatic/Solid		
	3.2 Tyre size, front	inch	300 x 15 / 7.5 x 16 - 16 PR	300 x 15 / 7.5 x 16 - 16 PR		
	3.3 Tyre size, rear	inch	7.00 x 12 - 16 PR / 7.00 x 12 - 16 PR	7.00 x 12 - 16 PR / 7.00 x 12 - 16 PR		
	3.4 Wheels, number front/rear (Single/Dual Drive)	-	2x/2, 4x/2	2x/2, 4x/2		
	3.5 Tread, front	b10 (mm)	1200	1200		
	3.6 Tread, rear	b11 (mm)	1070	1070		
	Dimensions	4.1 Tilt of mast forward/backward	α/β (deg)	6/10	6/10	
		4.2 Height, mast lowered	h1 (mm)	2700	2700	
4.3 Free lift		h2 (mm)	120	120		
4.4 Lift		h3 (mm)	3660	3660		
4.5 Height, mast extended*		h4 (mm)	4560	4560		
4.7 Height of overhead guard (cabin)		h6 (mm)	2390	2390		
4.8 Seat height		h7 (mm)	1300	1300		
4.12 Coupling Height		h10 (mm)	365	365		
4.19 Overall length		l1 (mm)	4380	4680		
4.20 Length to face of forks		l2 (mm)	3180	3480		
4.21 Overall width (single/dual drive)		b1 (mm)	1450/1790	1450/1790		
4.22 Fork dimensions		s/e/l (mm)	60X130X1200	60X130X1200		
4.23 Fork carriage		-	4A	4A		
4.24 Fork carriage width (single/dual drive)		b3 (mm)	1450/1790	1450/1790		
4.25 Maximum Fork spread (single/dual drive)		b5 (mm)	1400/1700	1400/1700		
Performance	4.31 Ground clearance, laden, below mast	m1 (mm)	160	160		
	4.32 Ground clearance, centre of wheelbase	m2 (mm)	180	180		
	4.34.1 Aisle width for pallets 1000 x 1200 crossways	Ast (mm)	5200	5500		
	4.35 Turning radius	Wa (mm)	3000	3300		
	5.1 Travel speed, laden/unladen	km/h	18/20	18/20		
5.2 Lift speed, laden/unladen	m/s	0.3	0.3			
5.3 Lowering speed, laden/unladen	m/s	0.35	0.35			
5.6 Max. Drawbar pull, laden/unladen S2 5min	N	2500	2500			
5.7 Gradeability, laden/unladen	%	21	21			
Power Unit	7.1 Engine manufacturer		Ashok Leyland H4C4	Ashok Leyland H4C4		
	7.2 Engine power	kW	54.4 (73 hp)	54.4 (73 hp)		
	7.3 Rated speed	rpm	2200	2200		
	7.3.1 Max. Torque	Nm/rpm	300-320/1500-1600	300-320/1500-1600		
7.4 No. of cylinders/displacement	no/cm ³	4/3810	4/3810			
Others	8.1 Type of Drive Unit	-	2/2 Automatic	2/2 Automatic		
	8.1 Fuel tank, Capacity	l	60	60		
	8.2 Service Brake	-	Pneumatic assisted Hydraulic Dry Disc Brake	Pneumatic assisted Hydraulic Dry Disc Brake		
	8.2 Parking Brake	-	Drum Type	Drum Type		
	8.3 Specific Fuel Consumption	g/KWh	224	224		

Type of Mast	Maximum Fork Height (MFH)	Overall Height Lowered (OAHL)	Overall Height Raised* (OAHR)	Free Lift (FL)	Derated Capacity at MFH (kg)				Tilt Angle (degree)	
					GX 500D (SB)		GX 500D (XB)		Fwd. (α)	Bwd. (β)
	h3 (mm)	h1 (mm)	h4 (mm)	h2 (mm)	Single drive	Dual drive	Single drive	Dual drive		
2 STAGE CV	4500	3100	5400	120	4000	4000	4500	4500	4	6
2 STAGE CV WITH FFL	3660	2700	4560	120	5000	5000	5000	5000	6	10
3 STAGE CV WITH FFL	2800	2200	3700	1300	5000	5000	5000	5000	6	10
	4000	2200	4900	1300	4500	4500	5000	5000	6	10
	5500	2700	6400	1800	3000	3000	3700	3700	4	6

CV = Clear View
 FFL = Full Free Lift
 *Overall Height Raised with Load Back Rest = OAHR w/o LBR + 600mm

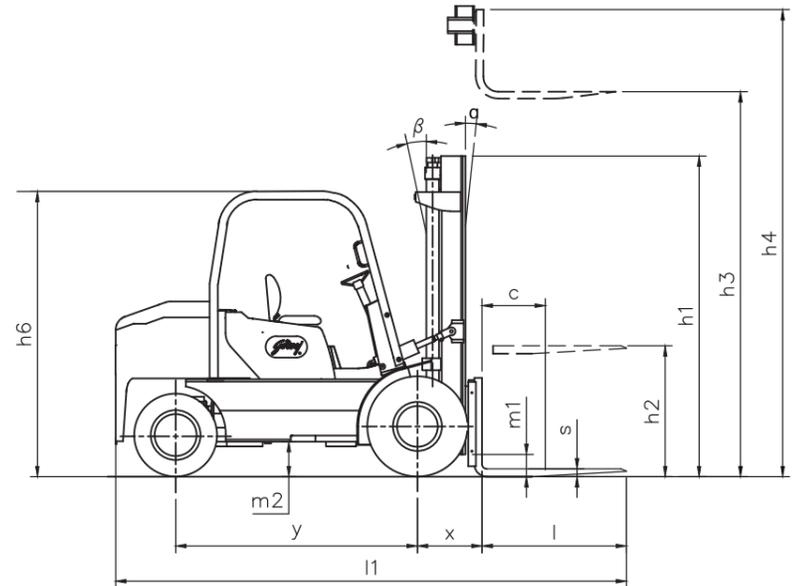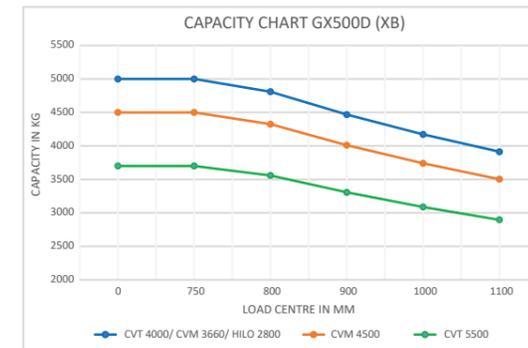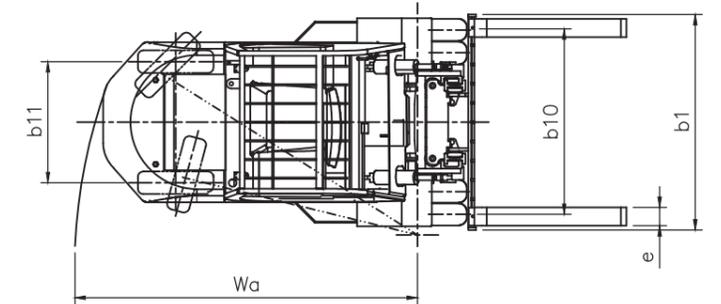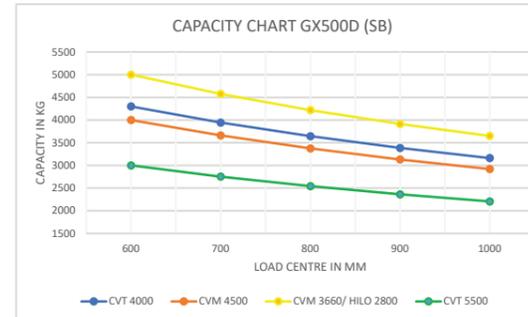

Note: All dimensions and specifications indicated are subjected to a variation of $\pm 10\%$ without prior notice
 The images shown in the brochure are representative, actual equipment may differ in colour and optional accessories



VARIOUS FINANCE OPTIONS AVAILABLE

- Equipment finance
- Lease finance
- Rentals



GODREJ & BOYCE MFG. CO. LTD.

Plant 16, Pirojshanagar, Vikhroli, Mumbai 400079

+91 22 7116 4660 • mhemktg@godrej.com • www.godrej.com/intra-logistics

Follow us on:



@GodrejMaterialHandling



godrejmaterialhandling



Godrej Material Handling



Godrej Material Handling

Represented by

BRANCHES

Ahmedabad: 079 6606 0646
Bangalore: 080 6647 2251
Bhubaneshwar: 0674 2374 627
Chandigarh: 0172 5012 525
Chennai: 044 6654 4431/32
Coimbatore: 0422 2545 799

Delhi: 011 6650 7348
Guwahati: 03612 468 242
Hyderabad: 040 6643 1203
Indore: 0731 4069 335
Jaipur: 0141 6701 443
Kochi: 0484 6612 777

Kolkata: 033 6601 3771
Lucknow: 0522 6754 980
Mumbai: 022 6976 1725
Pune: 020 6625 5121
Raipur: 0771 6606 606
Vizag: 0891 2746 511

To find out more
about what's new at
Godrej Material Handling,
check out
www.godrej.com/intra-logistics



SC: 01/2023/Rev 0